

PRODUCT SPECIFICATION

CSU PLINTH (COMPACT SUBSTATION UNIT)



ADVANTAGES:



1. Good choice of replacement for conventional cast-in-situ manhole



2. Hassle free installation with minimum interruption to traffic flow



3. Tremendous Time and Cost savings with factory quality finishes



4. Better loading capacity




5. Environmental Friendly as generate less construction waste



6. Minimum manpower and formwork required, better quality control

METHOD STATEMENT:

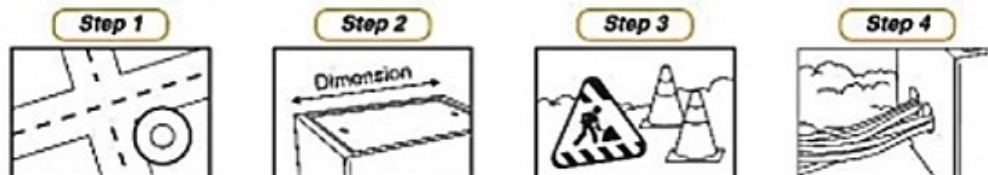


Step 1 ▶ The right location has to be determined

Step 2 ▶ Obtain the height and dimension of the manhole of choice.

Step 3 ▶ Start excavating a trench to install the manhole of choice. Please determine the direction of the incoming and outgoing cable connections before planting in the manhole of choice.

Step 4 ▶ Once installed, cabling works can start immediately.

SPECIFICATIONS:

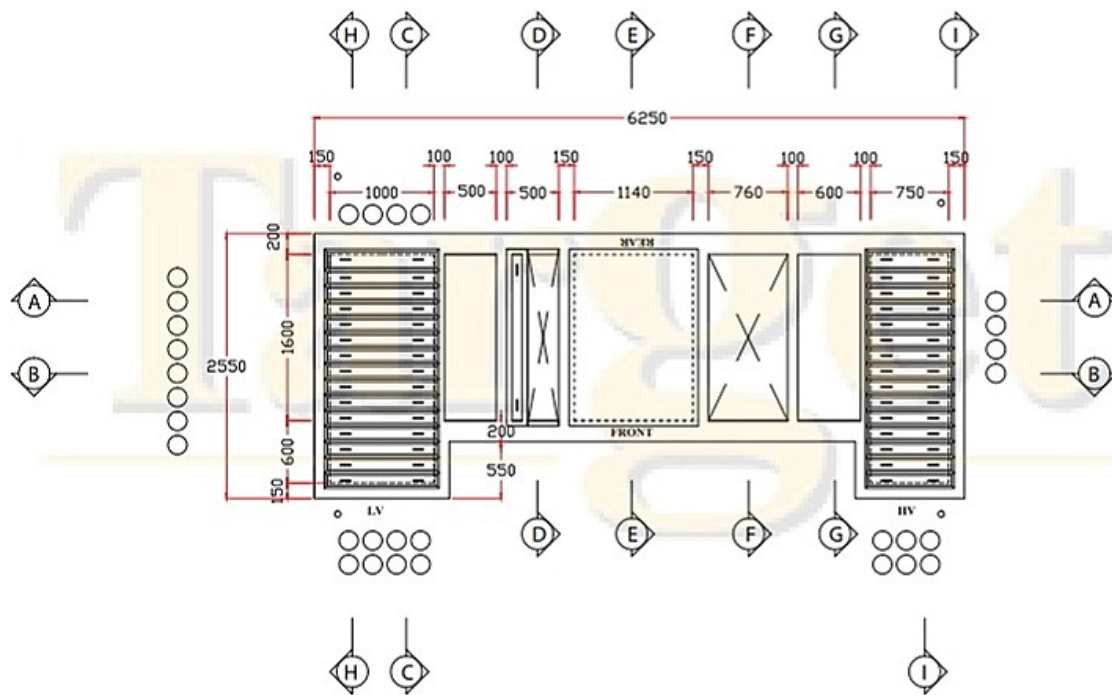


Notes:

- Cube strength of concrete shall be 30 mPa.

Dimension:

External(mm)			Internal(mm)			Approx Weight (kg)
Length (mm)	Width (mm)	Height (mm)	Length (mm)	Width (mm)	Height (mm)	
6250	2550	1350	5950	2200	1100	17000

SPECIFICATIONS:

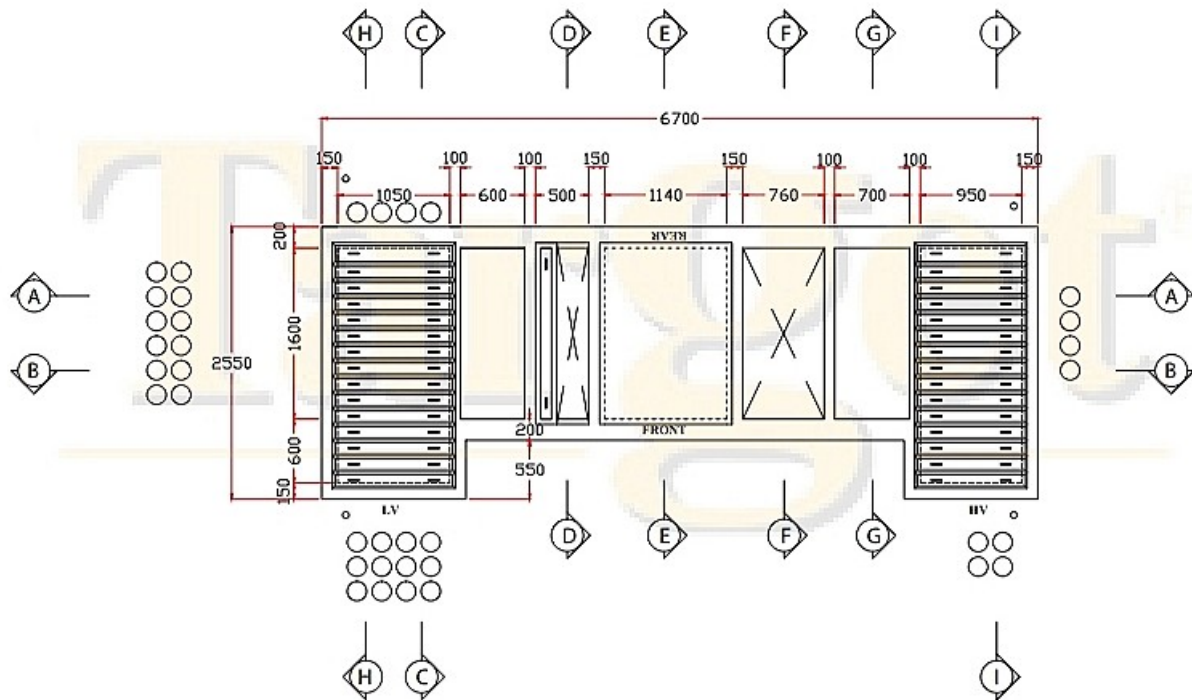

Notes:

- Cube strength of concrete shall be 30 mPa.

Dimension:

External(mm)			Internal(mm)			Approx Weight (kg)
Length (mm)	Width (mm)	Height (mm)	Length (mm)	Width (mm)	Height (mm)	
6700	2550	1350	6400	2200	1125	20000



TARGET PRECAST INDUSTRIES SDN. BHD. (258751-X)

No. 18 Jalan LP 2A/2, Taman Lestari Perdana, 43300 Seri Kembangan, Selangor Darul Ehsan.

Tel: 03 - 8944 1388 (Hunting Line) Fax: 03 - 8941 7288



KLR0500386